


NEXT D BEAM STRAND CONFIGURATION

REFER TO FLANGE CONNECTION DETAILS FOR MORE INFORMATION ON SHEAR KEY END


NEXT D BEAM TYPICAL REINFORCING SECTION


EXAMPLE SHOWN USING MAXIMUM WIDTH OF 10'-0"

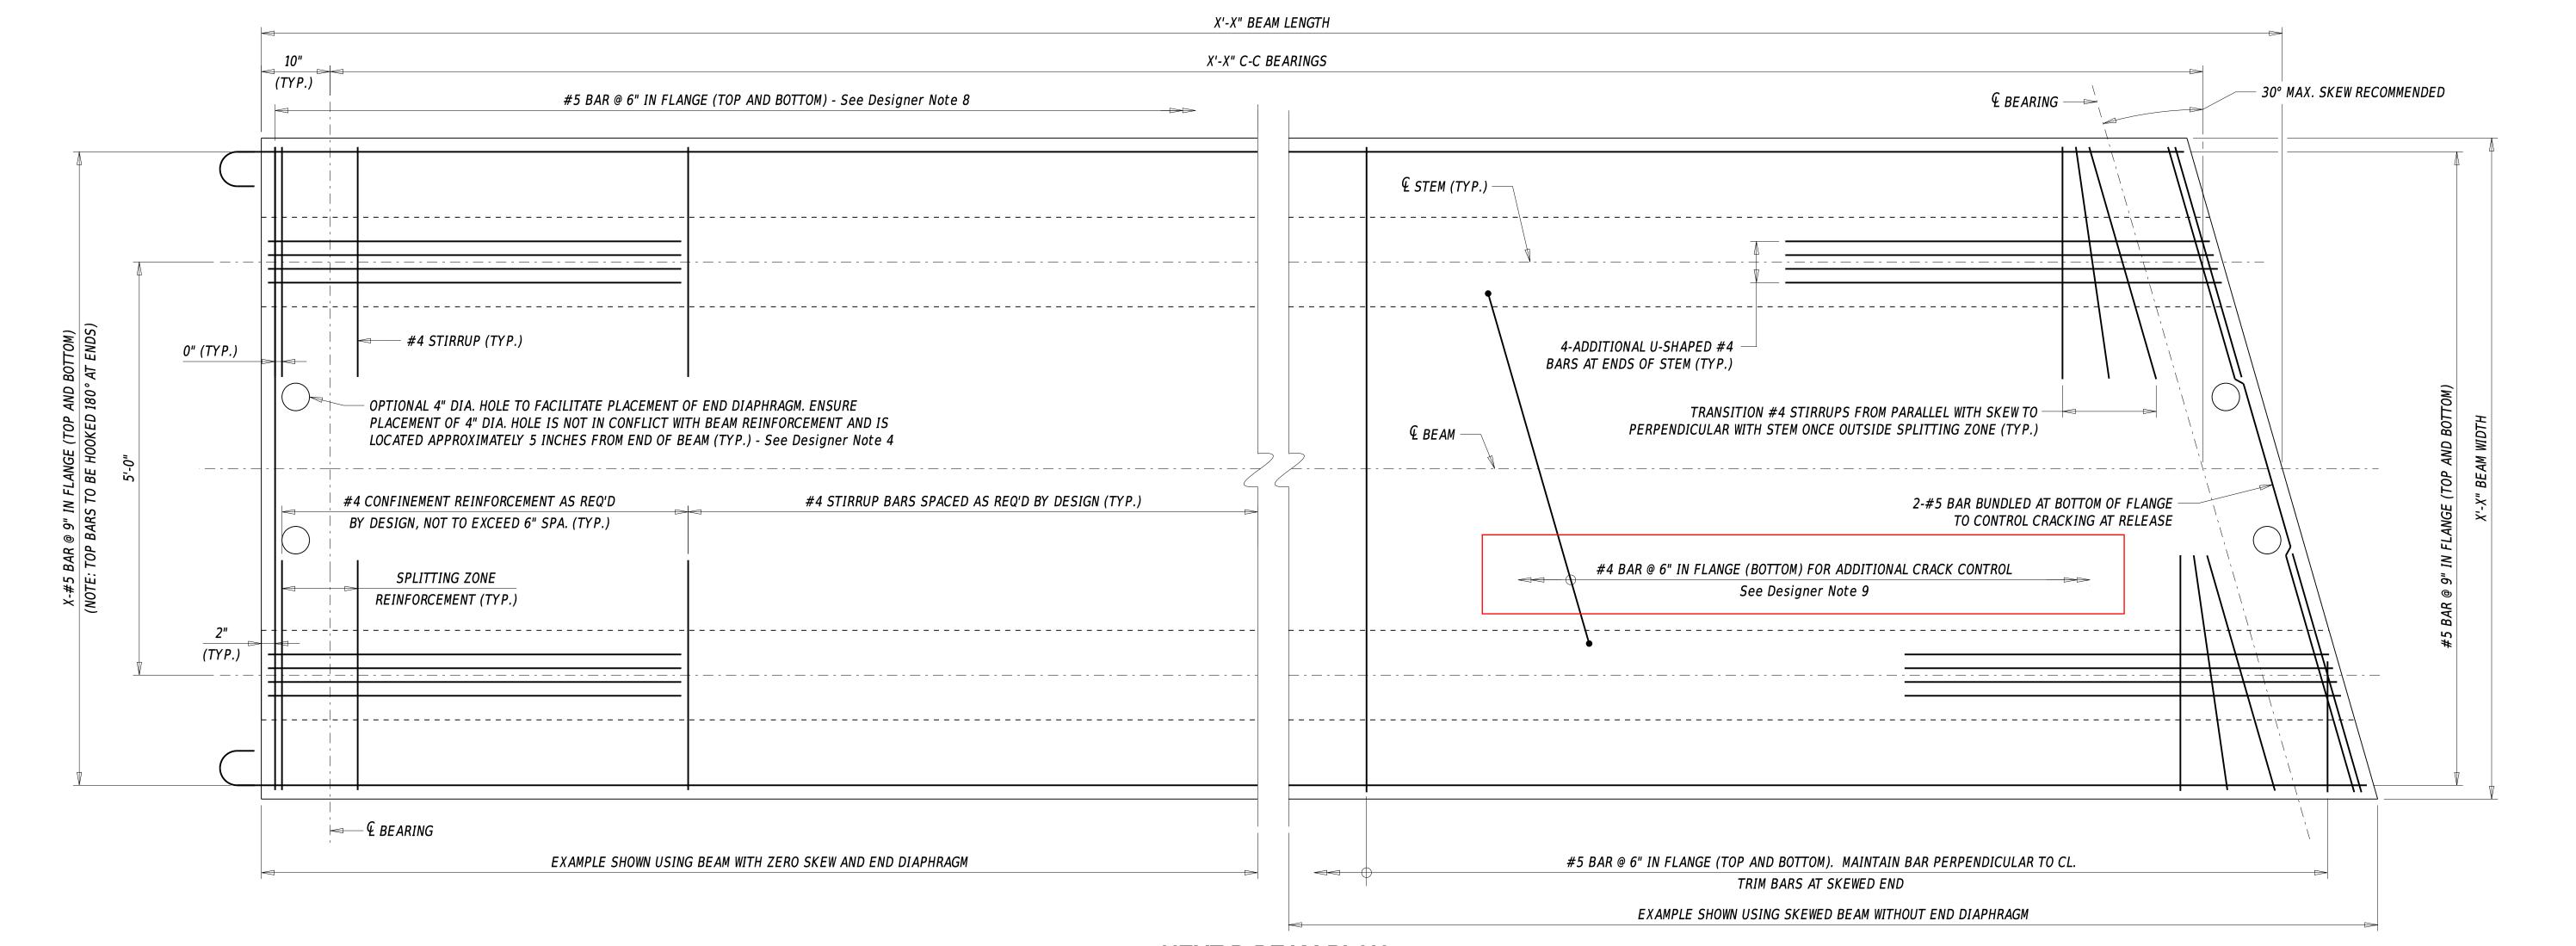


NEXT D BEAM PLAN

EXAMPLE SHOWN USING MINIMUM WIDTH OF 8'-0"

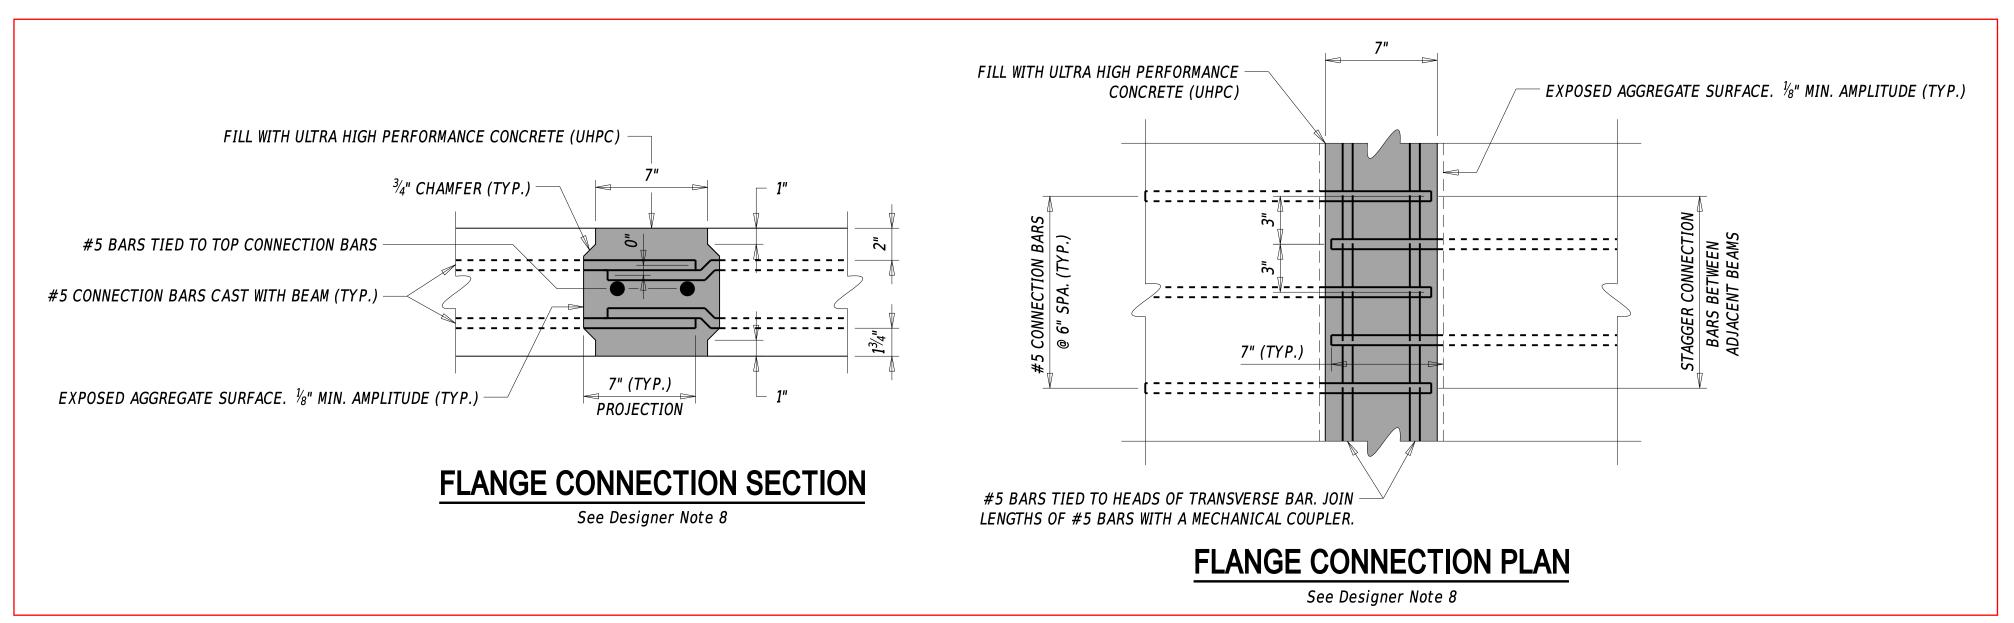

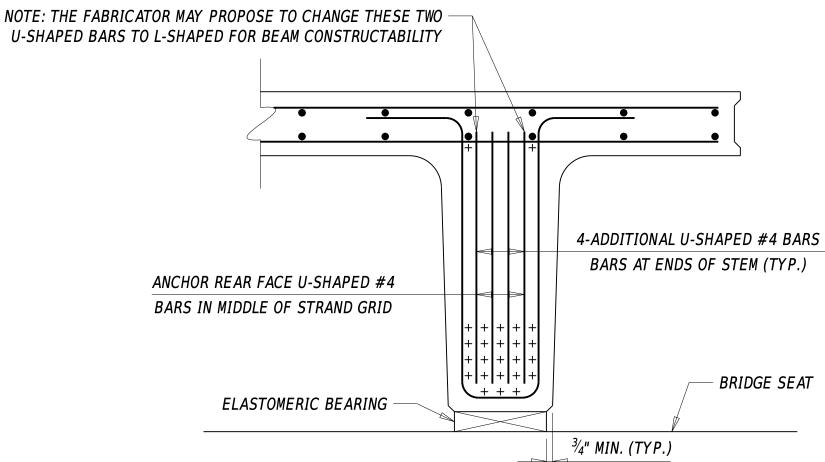

NEXT D BEAM STEM END SECTION

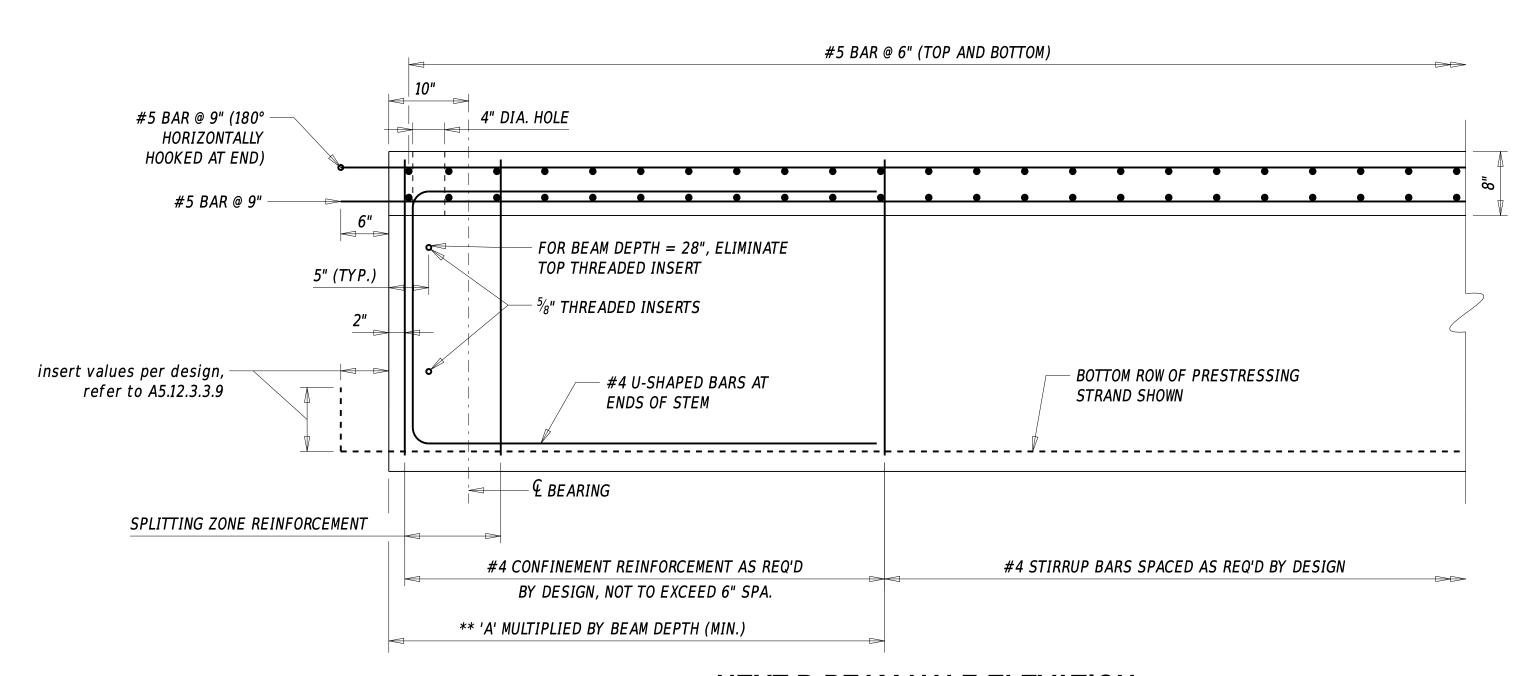


** CONFINEMENT ZONE
'A' = 2.0 FOR 0.6" DIA. STRANDS

NEXT D BEAM HALF-ELEVATION


NOTE: EXAMPLE SHOWN WITH END DIAPHRAGM.

NOTE: ALL REINFORCEMENT FOR THE NEXT BEAM IS INCLUDED IN ITEM (insert appropriate beam item number). THE REINFORCING BAR LIST AND BENDING DIAGRAMS MUST BE SHOWN ON THE NEXT BEAM SHEETS AND SEPARATE FROM THE BRIDGE REINFORCEMENT BAR SHEET.

REINFORCING BAR LIST								
	STRAIGHT BARS				BENT BARS			
MA	RK	SIZE	QTY.	LENGTH	MARK	SIZE	QTY.	LENGTH
BM5	XXE	5			BM4XXE	4		
BM5	XXE	5			BM4XXE	4		
BM5	XXE	5			BM4XXE	4		
BM5	XXE	5			BM4XXE	4		

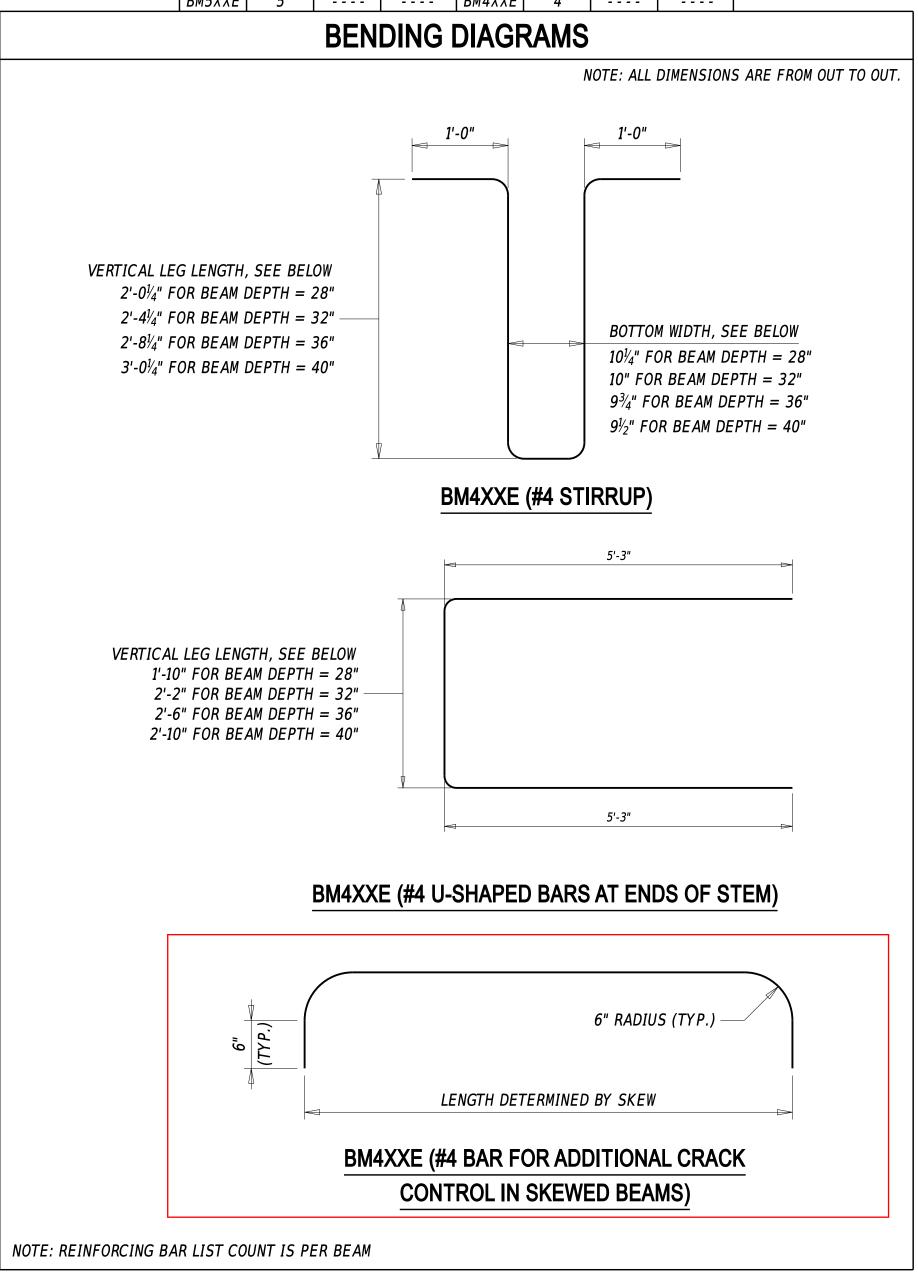

NOTE: THE ABOVE DIMENSIONS ARE RECOMMENDED. THE DESIGNER IS STILL RESPONSIBLE FOR ENSURING THAT THE DIMENSIONS SHOWN ON PLANS ARE ACCURATE AND PROJECT-SPECIFIC.

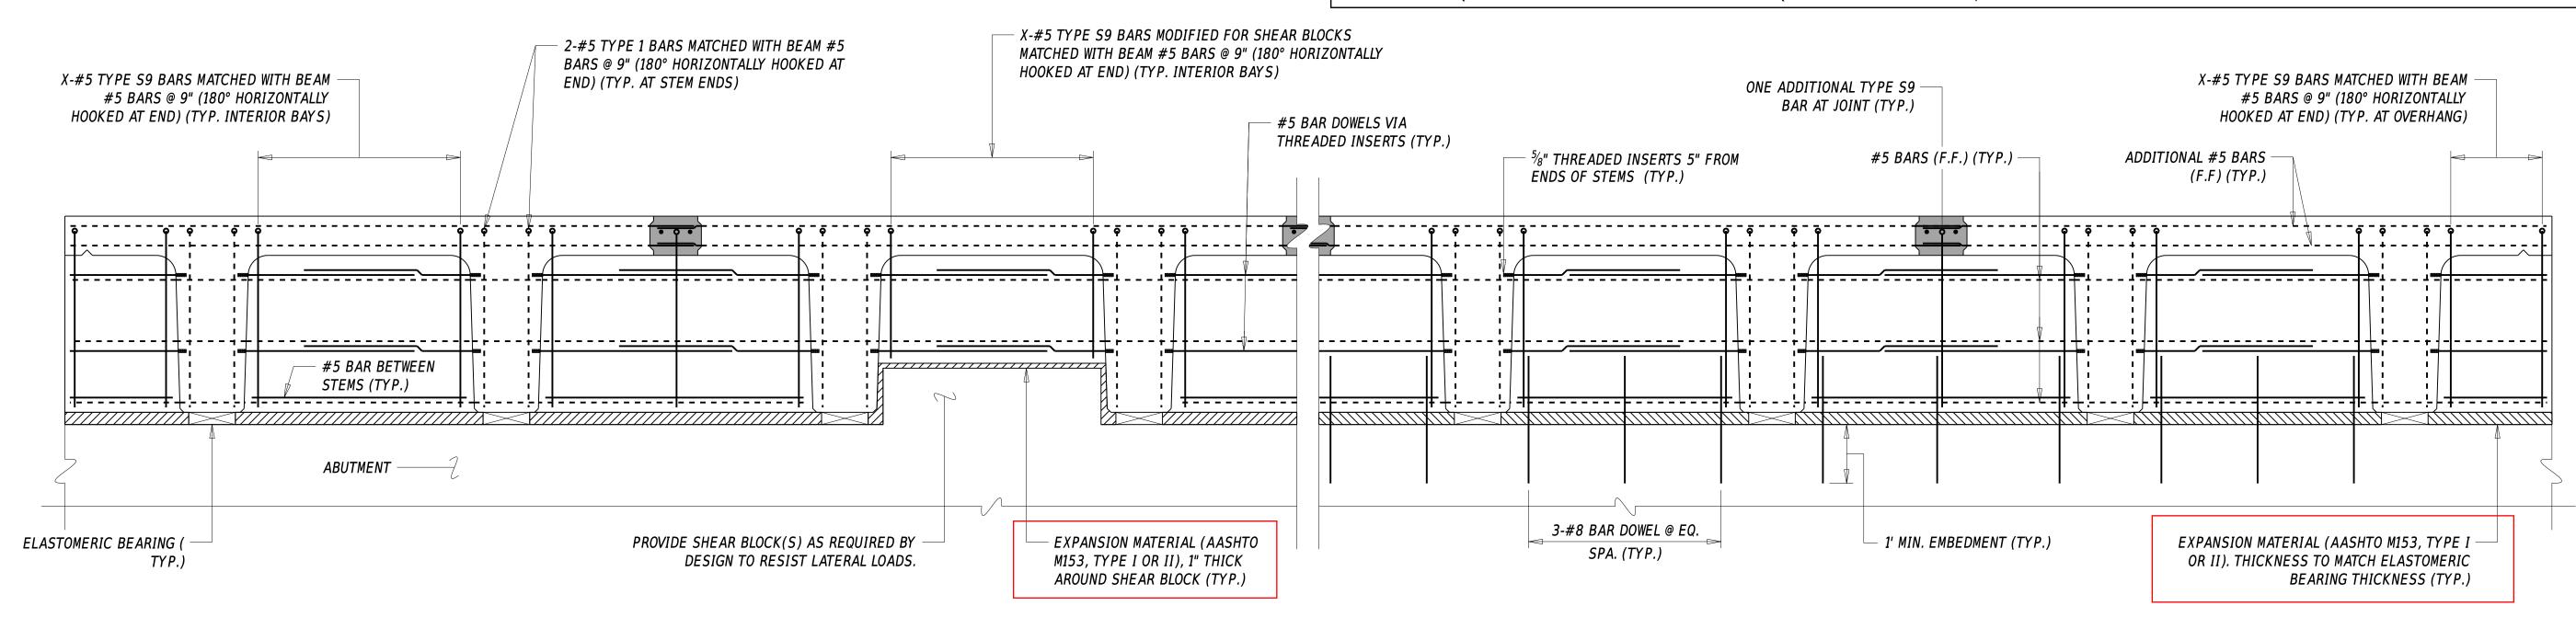


END DIAPHRAGM DETAIL FOR EXPANSION BEARINGS

EXAMPLE SHOWN USING 40" NEXT D BEAM WITH MAXIMUM BEAM WIDTH OF 10'-0" WITH 10'-7" BEAM SPACING

END DIAPHRAGM DETAIL FOR FIXED BEARINGS

EXAMPLE SHOWN USING 40" NEXT D BEAM WITH MAXIMUM BEAM WIDTH OF 10'-0" WITH 10'-7" BEAM SPACING

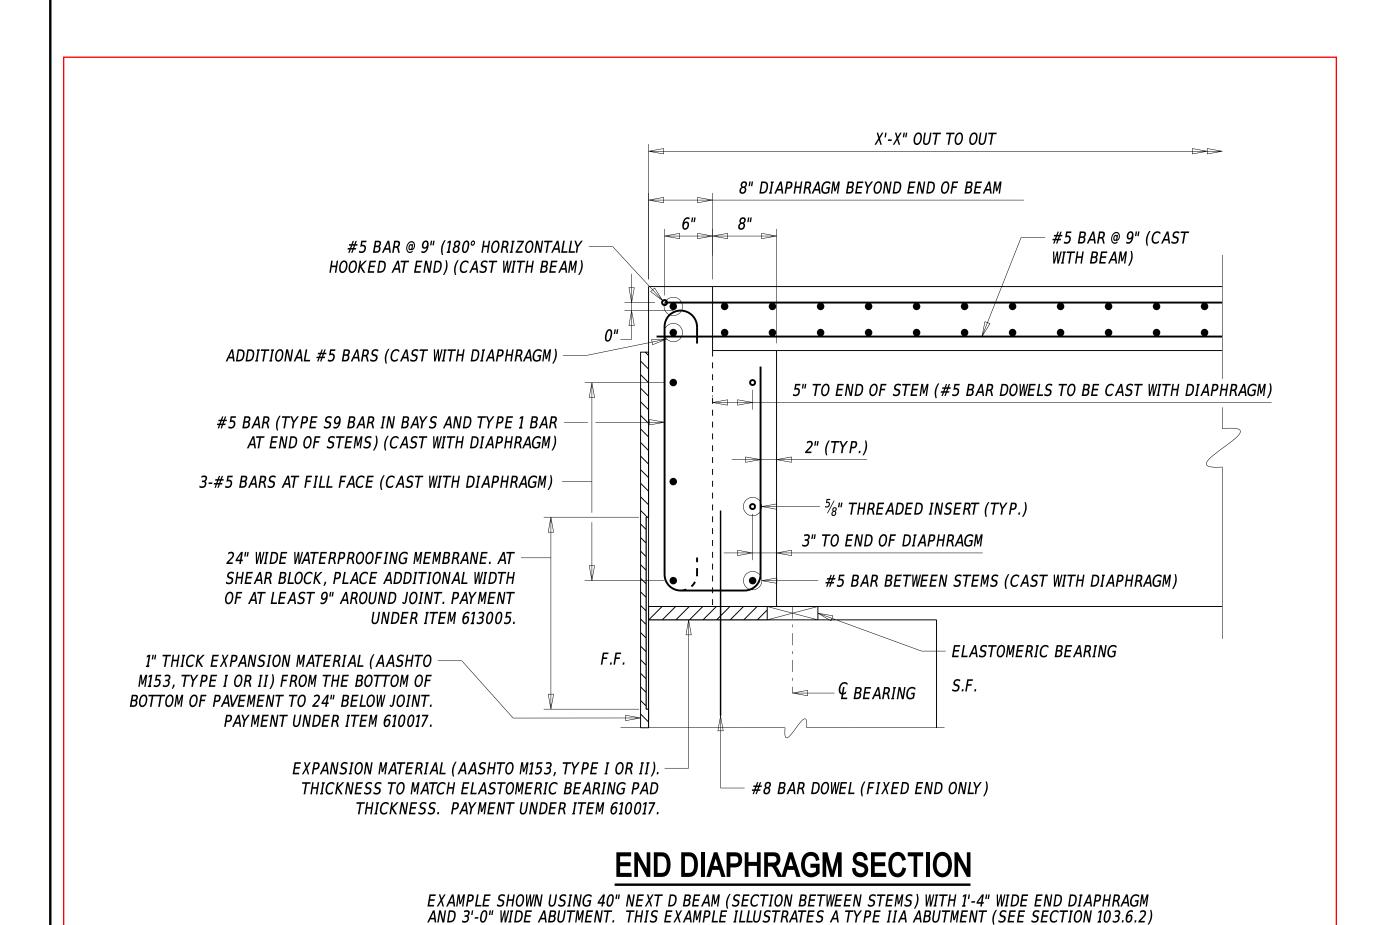

DESIGNER NOTES

- 1. REFER TO SECTIONS 103.4.1.2.3 AND 106.9 FOR MORE INFORMATION ON PRESTRESSED CONCRETE NEXT BEAMS.
- 2. ADDITIONAL GUIDANCE ON PRESTRESSED CONCRETE NEXT BEAMS CAN BE FOUND IN PUBLICATION 'NORTHEAST EXTREME TEE (NEXT) BEAM GUIDE DETAILS' (SECOND EDITION 2021) BY PRECAST/PRESTRESSED CONCRETE INSTITUTE NORTHEAST.
- 3. THE DEPARTMENT PREFERS USE OF NEXT D BEAMS OVER NEXT E OR NEXT F BEAMS. AS RESULT, ONLY NEXT D BEAMS ARE SHOWN IN THESE DETAILS. APPROVAL FROM THE BRIDGE DESIGN ENGINEER IS NEEDED BEFORE CHOOSING NEXT E OR NEXT F BEAMS OVER NEXT D BEAMS.
- NECESSARY BUT MUST ADJUST PLACEMENT OF FLANGE REINFORCEMENT TO AVOID ANY CONFLICTS. FOR BEAMS WITH MAXIMUM WIDTH OF 10', THE DESIGNER SHOULD CONSIDER INSTALLING ONE ADDITIONAL HOLE IN EACH OF INTERIOR FLANGE OVERHANGS.
- 5. POTENTIAL USE OF FLANGE BLOCKOUTS ARE NOT SHOWN IN THE DETAILS. THE DESIGNER MAY CONSIDER USE OF FLANGE BLOCKOUTS IF IT IS DETERMINED IT WILL NOT CAUSE SEVERE CRACKING WITHIN THE SPLITTING ZONE AT RELEASE.
- 6. THE PRESTRESSED CONCRETE NEXT BEAM SECTION AND STRAND CONFIGURATION AS SHOWN IN THESE DETAILS ARE RECOMMENDED. IF THE DESIGNER IS CONSIDERING USING DIFFERENT STRAND PATTERNS OR CREATING NON SYMMETRICAL SECTIONS, NOTE THAT THE FABRICATION COSTS WILL LIKELY INCREASE SIGNIFICANTLY.
- 7. 0.6" DIA. PRESTRESSING STRANDS SHALL BE USED IN PRESTRESSED CONCRETE NEXT BEAMS. DRAPING OF STRANDS IN PRESTRESSED CONCRETE NEXT BEAMS IS NOT PERMITTED. CONSIDER DEBONDING APPROXIMATELY HALF OF THE STRANDS FOR 6" TO ALLEVIATE CRACKING.
- 8. FLANGE CONNECTION REINFORCEMENT MUST BE PLACED PERPENDICULAR TO THE BEAM EDGE IN ALL CASES (SKEWED AND NON SKEWED CONDITIONS). FOR PRESTRESSED CONCRETE NEXT BEAMS WITH SKEWED ENDS, THE CONNECTION REINFORCEMENT SHOULD BE BEND WITHIN THE FLANGE IN ACUTE CORNERS TO PRODUCE A SQUARE PROJECTION.
- 9. SKEWED NEXT BEAMS EXPERIENCE INCREASED CRACKING AT RELEASE AND DURING HANDLING AND SHIPPING. ADD THE EXTRA BAR AS NOTED IN THE DETAILS. SKEWS IN EXCESS OF 30° ARE POSSIBLE WITH ADDITIONAL MEASURES TAKEN TO ALLEVIATE CRACKING. SEE THE PUBLICATION REFERENCE IN DESIGNER NOTE 2.
- 10. REINFORCEMENT FOR BARRIERS TO BE CAST WITH PRESTRESSED CONCRETE NEXT BEAMS NOT SHOWN FOR CLARITY. REFER TO DETAIL NO. 325.02 'BRIDGE RAILING DETAILS' FOR MORE INFORMATION. THE DESIGNER MUST VERIFY THAT THE OVERHANG REINFORCEMENT AS SHOWN IN DETAIL NO. 330.03 IS SUFFICIENT TO RESIST VEHICULAR IMPACT FORCES. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- 11. THE DESIGNER MUST CONSIDER THE DIFFERENCES IN DECK THICKNESS BETWEEN CENTERLINE OF BEARINGS AND POINT OF MINIMUM THICKNESS ALONG THE BEAM DUE TO THE DIFFERENCE IN THE PROFILE TO CAMBERED SHAPE OF THE PRESTRESSED CONCRETE NEXT BEAMS. THE FINAL GRADES AND SUBSTRUCTURE ELEVATIONS MUST BE ADJUSTED ACCORDINGLY. FOR BRIDGES ON SAG VERTICAL CURVES, CONSIDER THE APPROPRIATE OVERLAY TYPE TO USE DUE TO POTENTIAL CONFLICT BETWEEN BEAM CAMBER AND PROFILE GRADES. THE THICKNESS OF THE OVERLAY MAY BECOME EXCESSIVE AT THE BEAM ENDS. FOR BRIDGES ON CREST VERTICAL CURVES, SMALL DIFFERENCES BETWEEN THE BEAM CAMBER AND THE PROFILE GRADE CAN BE ACCEPTABLE WITHOUT ANY FURTHER ADJUSTMENTS. THIS SHOULD BE NOTED AS SO ON THE PLANS.
- 12. FURTHER GUIDANCE ON PIER DIAPHRAGM DETAILS AND DOWEL DETAILS CAN BE FOUND IN DETAIL 325.01 CONCRETE DECK DETAILS.
- 13. MORE INFORMATION ON ALTERNATIVE BARRIER/PARAPET ATTACHMENTS, END DIAPHRAGM DETAILS, PIER CONTINUITY DETAILS, AND UTILITY SUPPORT DETAILS CAN BE FOUND IN THE PUBLICATION REFERENCED IN DESIGNER NOTE 2. THESE DETAILS SHOULD BE CONSIDERED IF THE DETAILS AS SHOWN IN DETAIL NO. 325.01, 325.02, AND 330.03 ARE NOT REASONABLE CHOICES BASED ON PROJECT CONDITIONS.
- 14. ENSURE WORKING DRAWINGS MEET ALL REQUIREMENTS AS OUTLINED IN SECTION 612.3.1 OF THE DELDOT STANDARD SPECIFICATIONS.

F.F. = FILL FACES.F. = STREAM FACE